



Thomas Research Products


Innovative & Energy Saving Lighting Controls

HLPC Series Class 1, Div 2 Hazardous Location Photocell Assembly


The HLPC is a rugged Hazardous Location Photocell Assembly available in a variety of voltages for Class 1, Division 2 applications.

Features


- ◆ Voltage Configurations
 - A) HLPC-120 for 120V applications
 - B) HLPC-208-277 for 208V through 277V applications
 - C) HLPC-347 for 347V applications
- ◆ 1000W, 1000VA Load Rating
- ◆ 50/60 Hz Operation
- ◆ Epoxy Encapsulation for Superior Moisture and Chemical Resistance
- ◆ One-piece molded GE Ultem 1000 translucent lens assembly, UL94V-0 compliant
- ◆ Case Temperature Rating of 65°C
- ◆ For use in Class 1, Division 2 applications, Groups A, B, C, and D
- ◆ Kit Includes:
 - Photocell
 - Stainless Steel 5/8" Washer
 - Stainless Steel Knurled Locknut
 - Neoprene Gasket with Adhesive Back
 - (3) High Temperature 150°C Wirenuts

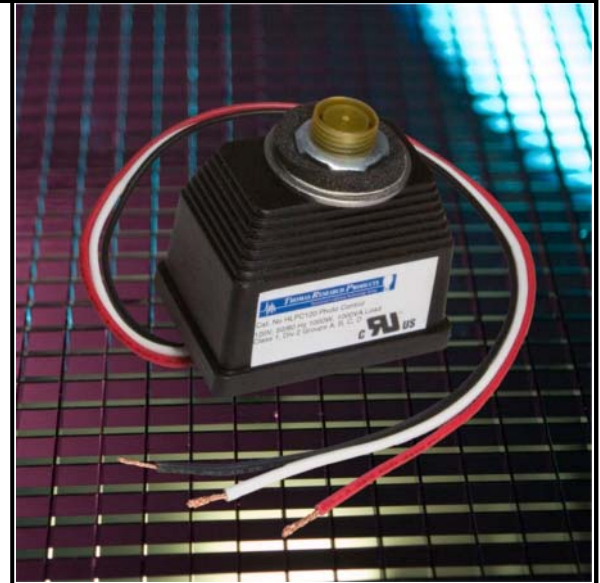

Dimensions



Wiring

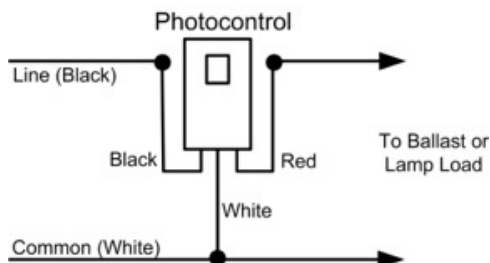

06-15-09